

# PRODUCT FAMILY DATASHEET

## DAMP PROOF SLIM VALUE

Damp-proof luminaire with slim housing



---

### AREAS OF APPLICATION

- Industrial and storage facilities
- Car parks and underpasses
- Garages
- Workshops, assembly lines

---

### PRODUCT BENEFITS

- Evenly distributed light
- Energy savings of up to 50 % (compared to luminaires that use fluorescent lamps)
- Very slim housing
- Easy installation as mounting brackets can be positioned freely on the luminaire
- Tool-free electrical connection due to push button connector
- 3 years guarantee

---

### PRODUCT FEATURES

- High luminous efficacy: up to 110 lm/W
- Beam angle: 120°
- Type of protection: IP65






TECHNICAL DATA

Product description	Electrical data			Luminaire control gear data	Photometrical data				Light technical data	Dimensions & weight	
	Nominal wattage	Nominal voltage	Mains frequency	Output current	Color temperature	Luminous flux	Light color (designation)	Color rendering index Ra	Beam angle	Length	Width
DP SLIM VALUE 1200 36 W 4000 K IP65 GY	36.00 W	220...240 V	50/60 Hz	460 mA	4000 K	4000 lm	Cool White	>80	120 °	1200 mm	35.0 mm
DP SLIM VALUE 1200 36 W 6500 K IP65 GY	36.00 W	220...240 V	50/60 Hz	460 mA	6500 K	4000 lm	Cool Daylight	>80	120 °	1200 mm	35.0 mm
DP SLIM VALUE 1500 50 W 4000 K IP65 GY	50.00 W	220...240 V	50/60 Hz	460 mA	4000 K	5500 lm	Cool White	>80	120 °	1500 mm	35.0 mm
DP SLIM VALUE 1500 50 W 6500 K IP65 GY	50.00 W	220...240 V	50/60 Hz	590 mA	6500 K	5500 lm	Cool Daylight	>80	120 °	1500 mm	35.0 mm

Product description	Height	Product weight	Colors & materials		Temperatures & operating conditions	Lifespan	Capabilities		Certificates & standards
			Body material	Product color	Ambient temperature range	Lifespan L70 at 25 °C	Dimmable	Type of connection	Protection class
DP SLIM VALUE 1200 36 W 4000 K IP65 GY	48.0 mm	450.00 g	Polycarbonate (PC)	White	-20...40 °C	30000 h	No	Fixed connection (terminal)	II
DP SLIM VALUE 1200 36 W 6500 K IP65 GY	48.0 mm	450.00 g	Polycarbonate (PC)	White	-20...40 °C	30000 h	No	Fixed connection (terminal)	II
DP SLIM VALUE 1500 50 W 4000 K IP65 GY	48.0 mm	510.00 g	Polycarbonate (PC)	White	-20...40 °C	30000 h	No	Fixed connection (terminal)	II
DP SLIM VALUE 1500 50 W 6500 K IP65 GY	48.0 mm	510.00 g	Polycarbonate (PC)	White	-20...40 °C	30000 h	No	Fixed connection (terminal)	II

Product description	Type of protection
DP SLIM VALUE 1200 36 W 4000 K IP65 GY	IP65

Product description	Type of protection
DP SLIM VALUE 1200 36 W 6500 K IP65 GY	IP65
DP SLIM VALUE 1500 50 W 4000 K IP65 GY	IP65
DP SLIM VALUE 1500 50 W 6500 K IP65 GY	IP65

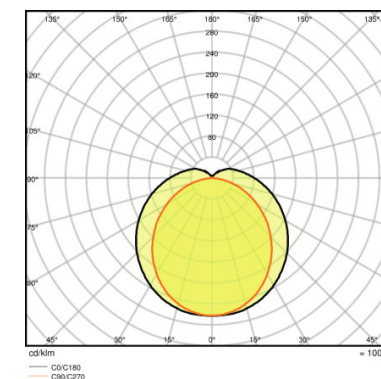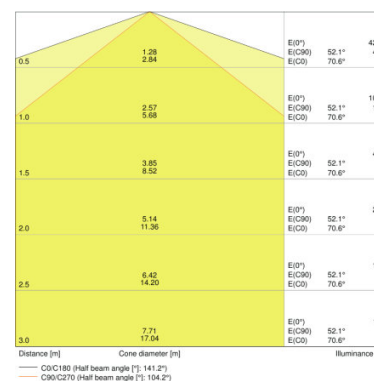



DP SLIM VALUE 1200 36 W 4000 K IP65  
GY, DP SLIM VALUE 1200 36 W 6500 K  
IP65 GY

DP SLIM VALUE 1500 50 W 4000 K IP65  
GY, DP SLIM VALUE 1500 50 W 6500 K  
IP65 GY

DP SLIM VALUE 1200 36 W 4000 K IP65  
GY

DP SLIM VALUE 1200 36 W 6500 K IP65  
GY

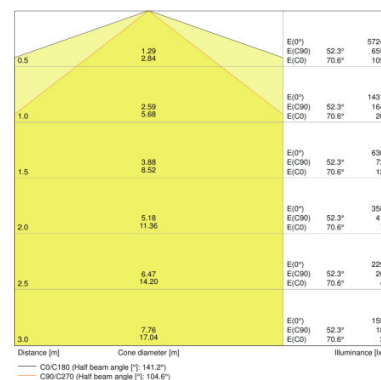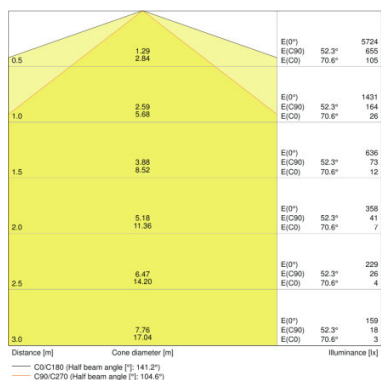

DP SLIM VALUE 1500 50 W 4000 K IP65  
GY

DP SLIM VALUE 1500 50 W 6500 K IP65  
GY

### EQUIPMENT / ACCESSORIES

- Stainless steel clamps with safety screws included
- Mounting accessories included (suspension kit, theft protection kit)

### APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

### LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075066458	DP SLIM VALUE 1200 36 W 4000 K IP65 GY	Shipping carton box 20	1271 mm x 215 mm x 226 mm	61.76 dm <sup>3</sup>	14090.00 g
4058075066472	DP SLIM VALUE 1200 36 W 6500 K IP65 GY	Shipping carton box 20	1271 mm x 215 mm x 226 mm	61.76 dm <sup>3</sup>	14090.00 g

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075066496	DP SLIM VALUE 1500 50 W 4000 K IP65 GY	Shipping carton box 20	1571 mm x 215 mm x 226 mm	76.33 dm <sup>3</sup>	12832.00 g
4058075066519	DP SLIM VALUE 1500 50 W 6500 K IP65 GY	Shipping carton box 20	1571 mm x 215 mm x 226 mm	76.33 dm <sup>3</sup>	16890.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

#### REFERENCES / LINKS

For Guarantee see

▶ [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

---

#### DISCLAIMER

— Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.