


3010...

BRONZE SWING CHECK VALVE METAL SEAT

SWING CHECK VALVES

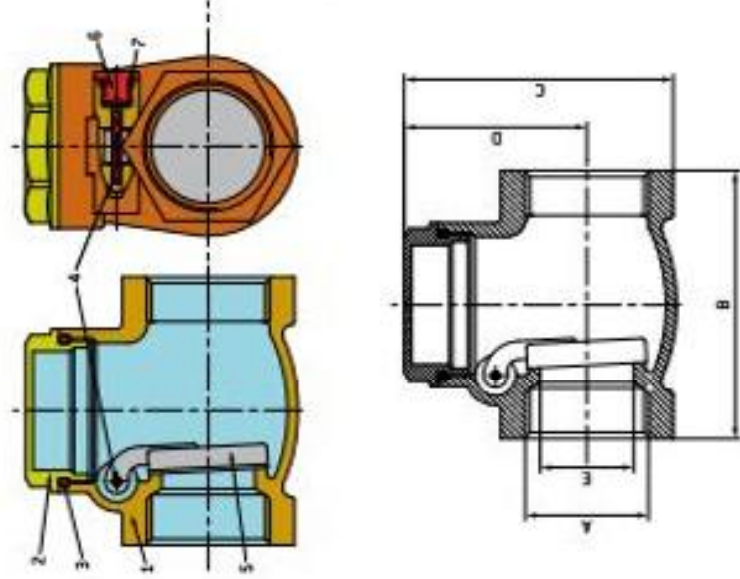

- Bronze swing check valve metal seat
- Female/Female thread: ISO 228
- NPT Female/Female thread on request
- Temperature range: 0°C to +95°C / min. +32°F to max. +203°F

This valve is particularly indicated for the non-return of fluids that can cause dezincification problems. It is also suitable for use in marine and other aggressive environments.

Other excellent fields of application are in plant engineering for plumbing and heating, industry and shipbuilding.

The direction of flow is indicated by an arrow on the valve body. It can be installed either horizontally or vertically.

Seat seal is provided by a metal-on-metal coupling.

COMPONENTS:

POSN.	PART NAME	No. Pcs.	MATERIAL
1	Body	1	Bronze CC491K UNI-EN 1982-2000
2	Cap	1	CW617N (for 3/8" and 1/2") UNI-EN 12164 CW617N (3/4" to 4") UNI-EN 12165
3	O-ring cap	1	NBR
4	Pin	1	CW617N UNI-EN 12164
5	Clapet	1	CW617N UNI-EN 12165
6	M8 cap	1	CW617N UNI-EN 12164
7	O-ring	1	NBR

DIMENSIONS MM:

DN	A	B	C	D	E	PN
10	3/8"	49	47	31	12	16
15	1/2"	55	53	36	14	16
20	3/4"	62	64	43	20	16
25	1"	72	73	49	25	16
32	1.1/4"	82	85	57	30	16
40	1.1/2"	90	95	63	35	16
50	2"	105	107	69	47	16
65	2.1/2"	125	128	82	60	16
80	3"	144	145	91	74	16
100	4"	176	192	123	95	16

DIMENSIONS INCH:

A	B	C	D	E	PSI
3/8"	1,929	1,850	1,220	0,472	200
1/2"	2,165	2,087	1,417	0,551	200
3/4"	2,441	2,520	1,693	0,787	200
1"	2,835	2,874	1,929	0,984	200
1.1/4"	3,228	3,346	2,244	1,181	200
1.1/2"	3,543	3,740	2,480	1,378	200
2"	4,134	4,213	2,717	1,850	200
2.1/2"	4,921	5,039	3,228	2,362	200
3"	5,659	5,709	3,583	2,913	200
4"	6,929	7,559	4,843	3,740	200

PACKAGING:

CODE	3/8"	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"	2.1/2"	3"	4"
PIECES PER BOX	20	15	10	6	-	-	-	-	-	-
PIECES PER CARTON	200	150	100	60	50	35	25	15	10	6