




**ENERG**  
енергия · ενεργεια



**NIBE**

NIBE F1255-6



55 °C

35 °C



**A++**


**A++**



**42** dB



dB



kW

kW



2015

811/2013



**ENERG**  
енергия · ενεργεια


Y IJA  
IE IA

**NIBE**


NIBE F1255-6

 55°C


 XL

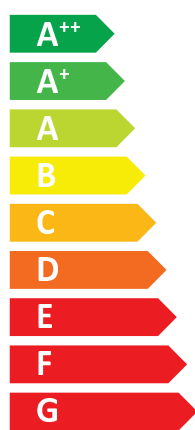

**A++**

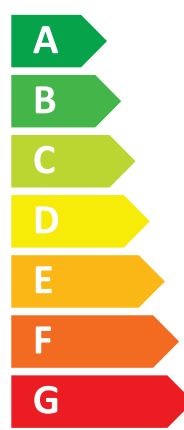

**A**

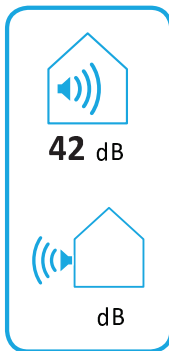

2015

811/2013



# ENERG

енергия · ενεργεια

Y

IJA

IE

IA

**NIBE**

## NIBE F1255-6

 35 °C



**A<sup>++</sup>**

**A<sup>+++</sup>**

**A<sup>+++</sup>**

**A<sup>++</sup>**

**A<sup>+</sup>**

**A**

**B**

**C**


**D**

**E**

**F**

**G**

+



+



+



+





# ENERG

енергия · ενέργεια

Y







IJA

IE



IA


**NIBE**


## NIBE F1255-6










55 °C







+ 

+ 

+ 

+ 






## Product fiche

Supplier's name:	NIBE		
Model:	NIBE F1255-6		
Temperature application	35	55	°C
Declared load profile for water heating	XL		
Seasonal space heating energy efficiency class, average climate:	A++	A++	
Water heating energy efficiency class, average climate:	A		
Rated heat output, average climate:	5,5	5,5	kW
Annual energy consumption for space heating, average climate	2188	2875	kWh
Annual electricity consumption for water heating, average climate	1642		kWh
Seasonal space heating energy efficiency, average climate:	200	150	%
Water heating energy efficiency, average climate:	102		%
Sound power level LWA indoors	42	42	dB
Rated heat output, cold climate:	5,5	5,5	kW
Rated heat output, warm climate:	5,5	5,5	kW
Annual energy consumption for space heating, cold climate	2481	3287	kWh
Annual electricity consumption for water heating, cold climate	1642		kWh
Annual energy consumption for space heating, warm climate	1408	1852	kWh
Annual electricity consumption for water heating, warm climate	1642		kWh
Seasonal space heating energy efficiency, cold climate:	211	157	%
Water heating energy efficiency, cold climate:	102		%
Seasonal space heating energy efficiency, warm climate:	201	151	%
Water heating energy efficiency, warm climate:	102		%
Sound power level LWA outdoors	-	-	dB

## Data for package fiche

Controller class	VI		
Controller contribution to efficiency	4		%
Seasonal space heating energy efficiency of package, average climate:	204	154	%
Seasonal space heating energy efficiency class for package, average climate:	A+++	A+++	%
Seasonal space heating energy efficiency of package, cold climate:	215	161	%
Seasonal space heating energy efficiency of package, warm climate:	205	155	%

<b>Model(s):</b>				<b>NIBE F1255-6</b>								
Type of heat source/sink:				Brine-to-water								
Low-temperature heat pump:				No								
Equipped with supplementary heater:				Yes								
Heat pump combination heater:				Yes								
Climate condition:				Average								
Temperature application:				Medium temperature (55 °C)								
Applied standards: EN14825 and EN16147												
<b>Rated heat output</b>				Prated	5,5	kW		<b>Seasonal space heating energy efficiency</b>				
								$\eta_s$	150	%		
<i>Declared capacity for part load at outdoor temperature Tj</i>						<i>Declared coefficient of performance for part load at outdoor temperature Tj</i>						
Tj = -7 °C		Pdh	5,0	kW		Tj = -7 °C		COPd	3,06	kW		
Tj = +2 °C		Pdh	3,0	kW		Tj = +2 °C		COPd	3,97	kW		
Tj = +7 °C		Pdh	2,0	kW		Tj = +7 °C		COPd	4,63	kW		
Tj = +12 °C		Pdh	1,2	kW		Tj = +12 °C		COPd	4,86	kW		
Tj = biv		Pdh	5,4	kW		Tj = biv		COPd	2,84	kW		
Tj = TOL		Pdh	5,4	kW		Tj = TOL		COPd	2,84	kW		
Tj = -15 °C (if TOL < -20 °C)		Pdh		kW		Tj = -15 °C (if TOL < -20 °C)		COPd		kW		
Bivalent temperature				T <sub>biv</sub>	-10	°C		Operation limit temperature				
Cycling interval capacity for heating				P <sub>cyh</sub>		kW		Cycling interval efficiency				
Degradation co-efficient				Cdh	0,99	-		Heating water operating limit				
								WTOL				
								65				
								°C				
								-				
								°C				
<i>Power consumption in modes other than active mode</i>						<i>Supplementary heater</i>						
Off mode		P <sub>OFF</sub>	0,002	kW		Rated heat output		P <sub>sup</sub>	0,1	kW		
Thermostat-off mode		P <sub>TO</sub>	0,007	kW								
Standby mode		P <sub>SB</sub>	0,007	kW		Type of energy input		Electric				
Crankcase heater mode		P <sub>CK</sub>	0,009	kW								
<i>Other items</i>												
Capacity control		variable				Rated air flow rate, outdoors					m <sup>3</sup> /h	
Sound power level, indoors/outdoors		L <sub>WA</sub>	42/-	dB								
Annual energy consumption		Q <sub>HE</sub>	2875	kWh		Rated brine or water flow rate, outdoor heat exchanger			0,68	m <sup>3</sup> /h		
<i>For heat pump combination heater:</i>												
<b>Declared load profile</b>				<b>XL</b>				<b>Water heating energy efficiency</b>				
								$\eta_{wh}$				
								102				
								%				
Daily electricity consumption		Q <sub>elec</sub>	7,48	kWh		Daily fuel consumption		Q <sub>fuel</sub>		kWh		
Annual electricity consumption		AEC	1642	kWh		Annual fuel consumption		AFC		GJ		
<b>Approved by:</b>												
<b>Contact details</b>		© NIBE Energy Systems - Box 14 - Hannabadsvägen 5 - 28521 Markaryd - Sweden										