

# PRODUCT DATASHEET

## O FACADE LANTERN 12 W 3000 K IP54 GY

OUTDOOR FACADE LANTERN | Contemporary lanterns with light guide for low-glare illumination



---

### AREAS OF APPLICATION

- Outdoor
- Building facades
- Gardens, balconies and other outdoor areas

---

### PRODUCT BENEFITS

- Energy-efficient thanks to LED technology
- 5 years guarantee
- Easy and quick installation
- Special light guide design for low-glare illumination

---

### PRODUCT FEATURES

- Bright and functional outdoor LED luminaires
- Type of protection: IP54
- Die-cast aluminum housing
- Diffuser made of opal polycarbonate with transparent polycarbonate cover



**TECHNICAL DATA**

Electrical data

<b>Operating mode</b>	Mains voltage
<b>Mains frequency</b>	50/60 Hz
<b>Power factor λ</b>	0.5
<b>Nominal wattage</b>	12.00 W
<b>Nominal voltage</b>	220...240 V
<b>Nominal current</b>	0.096 A


Photometrical data

<b>Color temperature</b>	3000 K
<b>Luminous efficacy</b>	50 lm/W
<b>Luminous flux</b>	610 lm
<b>Light color (designation)</b>	Warm White
<b>Color rendering index Ra</b>	≥80
<b>Standard deviation of color matching</b>	6 sdc <sub>m</sub>

Light technical data

<b>Beam angle</b>	210.00 °
-------------------	----------

— Dimensions & weight



<b>Length</b>	176.0 mm
<b>Width</b>	110.0 mm
<b>Height</b>	240.0 mm
<b>Product weight</b>	1300.00 g

Colors & materials

<b>Housing color</b>	Gray
<b>Product color</b>	Gray

<b>Body material</b>	Aluminum
<b>Cover material</b>	Polycarbonate (PC)

### Temperatures & operating conditions

<b>Ambient temperature range</b>	-20...40 °C
----------------------------------	-------------

### Lifespan

<b>Number of switching cycles</b>	15000
<b>Lifespan L70 at 25 °C</b>	30000 h
<b>Lifespan L80 at 25 °C</b>	- h
<b>Lifespan L90 at 25 °C</b>	- h

### Additional product data

<b>Mounting type</b>	Surface
<b>Mounting location</b>	Wall



### Capabilities

<b>Dimmable</b>	No
<b>Type of connection</b>	Screw terminal, 3-Pole
<b>LED module replaceable</b>	Not replaceable

### Certificates & standards

<b>Type of protection</b>	IP54
<b>Protection class</b>	I
<b>Protection class IK (shock resistance)</b>	IK06
<b>Glow Wire Test according to IEC 695-2-1</b>	-
<b>Photobio. safety group acc. to EN62471</b>	RG 0
<b>Luminaire with limited surface temperature, class "D"</b>	-
<b>Standards</b>	CE

Light Distribution

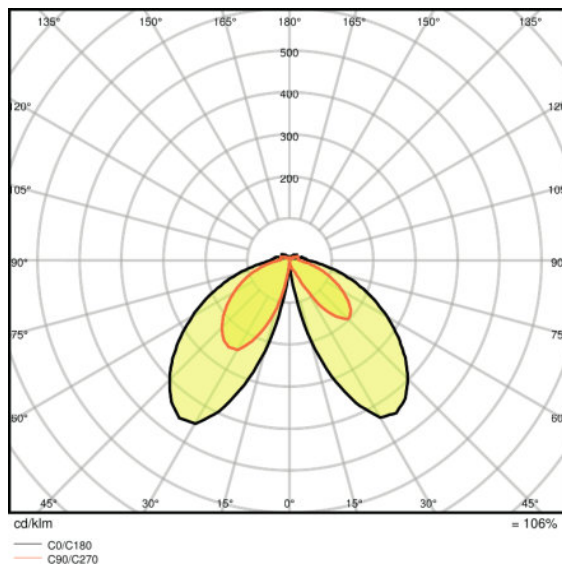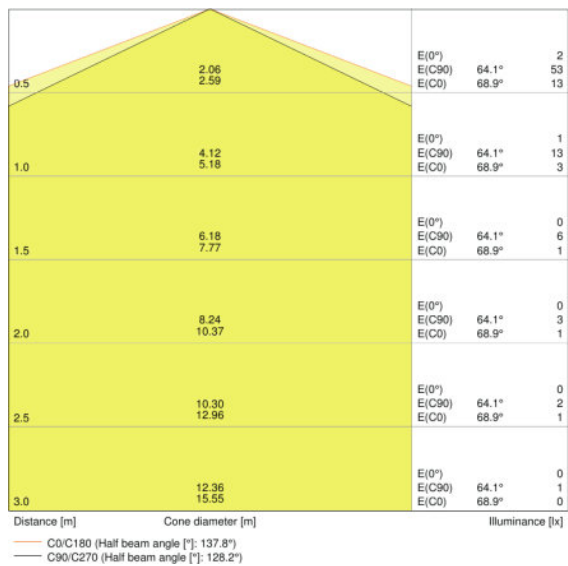

LDC typ cone

LDC typ polar

EQUIPMENT / ACCESSORIES

- Complete mounting and connecting accessories included

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075074835	Folding carton box 1	134 mm x 204 mm x 296 mm	1370.00 g	8.09 dm <sup>3</sup>
4058075074842	Shipping carton box 4	425 mm x 285 mm x 315 mm	5822.00 g	38.15 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

For Guarantee see  
 ▶ [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.